


# Agilent 85640A Portable Tracking Generator

300 kHz to 2.9 GHz

Data Sheet

An MIL-rugged, portable tracking generator for your Agilent 8560A, 8561A/B or 8562A/B portable spectrum analyzer

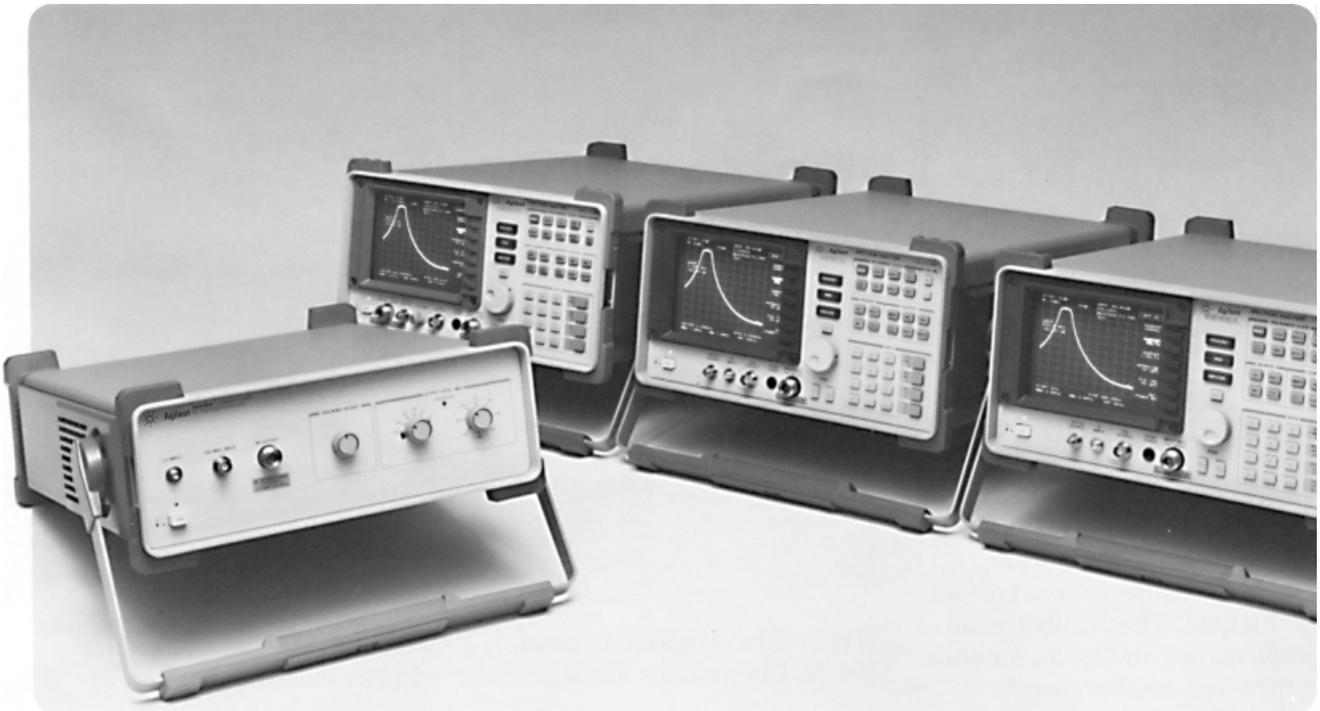

## Scalar and Spectrum Analysis

Combining the Agilent 85640A tracking generator with a portable spectrum analyzer results in a system having both scalar-analysis and spectrum-analysis capabilities. Use the scalar-analysis capability to perform measurements such as gain, frequency response, compression flatness, and return loss on components and sub-systems. Use the spectrum analysis capability to measure harmonic and inter-modulation distortion, as well as spurious products.



**Agilent Technologies**



## Versatility in the Field


---

The combination of the 85640A and a portable analyzer allows you to make a wide variety of scalar measurements in the field. Check sub-system performance and make antenna return-loss measurements to isolate potential problems. Use your portable scalar system and the analyzer's built-in FFT capability to locate faults in cables and interconnections. Opens and shorts, as well as damaged or poorly-connected cables, can be isolated and then repaired.

## Portable and Rugged

---

Lightweight, portable, and MIL-rugged, the 85640A is the perfect addition to your 8560A, 8561A/B or 8562A/B portable spectrum analyzer. The 85640A also shares the five-minute warm-up and tough environmental specifications found in these analyzers. So, it's an ideal solution for field-service, bench, and manufacturing scalar measurements.

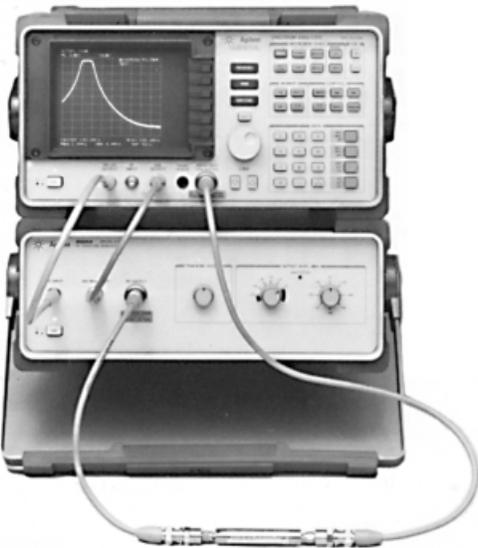

## High Throughput and Wide Dynamic Range

---

A tracking generator combined with a spectrum analyzer allows measurements to be made with fast, continuous sweeps. The 85640A features a dynamic range higher than 115 dB and shares the synthesized frequency accuracy of the spectrum analyzer. This lets you quickly and accurately make real-time adjustments of devices and measure parameters such as filter rejection and switch insulation. In addition, the 85640A includes a manually-controlled, built-in output attenuator and vernier, so you can vary the output level for measurements like gain compression.

## Specifications

---

Specifications describe the instrument's warranted performance. Typical performance is non-warranted. Supplemental characteristics are denoted by "nominal" or "approximately"; these constitute non-warranted functional performance information derived during the design process and are not tested on a continuing basis.

Unless noted, all specifications describe the instrument's warranted performance under the following conditions: 5-minute warm-up from ambient conditions, tracking adjusted, 1-year calibration cycle, and environmental requirements met.

### Frequency/amplitude


<b>Frequency range</b>	300 kHz to 2.9 GHz
<b>Tracking drift</b>	300 Hz per hour (nominal)(after 30 min. warm-up)
<b>Output power level</b>	
Max	0 dBm
Range	-80 dBm to 0 dBm
Resolution	10 dB with atten, vernier continuously adjustable
<b>Flatness</b>	±2.0 dB (ref to 300 MHz with 10 dB atten.)
<b>Vernier range</b>	> 10 dB
<b>Output attenuator</b>	
Range	70 dB
Switching accuracy	
(10 to 70 dB settings ref to 0 dB)	±0.8 dB/10 dB
±1.5 dB max	
Repeatability	±0.2 dB (nominal)
<b>Spurious output</b> (-10 dBm, 10 dB atten)	
Harmonic spurs	< -25 dBc
Non-harmonic spurs	
300 kHz to 2.0 GHz	< -27 dBc
2.0 to 2.9 GHz	< -23 dBc
LO feedthrough (> 2.9 GHz)	< -26 dBm
<b>Output return loss</b>	
0 dB atten	10 dB
10 dB atten	17 dB (nominal)
<b>Dynamic range</b> (1 MHz to 2.9 GHz, 300 Hz RBW)	
300 kHz to 1 MHz	95 dB
1 MHz to 2.7 GHz	115 dB
2.7 to 2.9 GHz	110 dB
<b>Min RBW supported</b>	300 Hz
	100 Hz (8561A, 8562A/B)

### Inputs and outputs

<b>RF output</b>	Type N female, front panel
Impedance	50 ohm (nominal)
<b>300 MHz input</b>	BNC female, front panel
<b>LO input</b>	SMA female, front panel
<b>Blanking input</b>	BNC female, rear panel
<b>Ext. ALC input</b>	BNC female, rear panel. Use with negative detector

## General Specifications

<b>Warm-up</b>	5 minutes from ambient
<b>Temperature</b>	
Operating	-10° C to +50° C
Storage	-62° C to +85° C
<b>Humidity</b>	95% at 40° C for 5 days
<b>Altitude</b>	
Operating	15,000 ft
Storage	50,000 ft
<b>Vibration</b>	
5 to 15 Hz	0.059 inch p-p excursion
15 to 25 Hz	0.039 inch p-p excursion
25 to 55 Hz	0.020 inch p-p excursion
<b>Pulse shock (half sine)</b>	30 g's for 11 ms duration
<b>Transit drop</b>	8-inch drop on 6 faces and 8 corners
<b>Electromagnetic capability</b>	Conducted and radiated interference is in compliance with CISPR publication 11 (1985) and FTZ 526/527/79. Meets MIL-STD-461B, Part 4, with exceptions
<b>Power requirements</b>	110, 120, 220 or 240 V ( $\pm 10\%$ ), 47 to 66 Hz
<b>Maximum power dissipation</b>	130 VA, 35 W
<b>Weight</b>	8.4 kg (18.5 lbs) nominal
<b>Compatibility</b>	Works with 8560A, 8561A/B, and 8562A/B portable spectrum analyzers

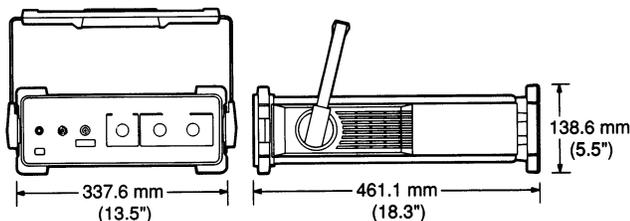

## Parts List

<b>85640A</b>	Tracking generator (Includes 3 double shielded BNC cables and 1 SMA cable)
<b>Option 908</b>	Rackmount kit
<b>Option 909</b>	Rackmount kit with handles
<b>8560A</b>	Spectrum analyzer
<b>8561B</b>	Spectrum analyzer
<b>8562A</b>	Spectrum analyzer
<b>8562B</b>	Spectrum analyzer
<b>85620A</b>	Mass memory module
<b>85629B</b>	Test and adjustment module



## Agilent Email Updates

[www.agilent.com/find/emailupdates](http://www.agilent.com/find/emailupdates)  
Get the latest information on the products and applications you select.

## Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

### Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you receive your new Agilent equipment, we can help verify that it works properly and help with initial product operation.

### Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and onsite education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

### Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit [www.agilent.com/find/connectivity](http://www.agilent.com/find/connectivity) for more information.

For more information on Agilent Technologies' products, applications or services, please contact your local Agilent office. The complete list is available at:

[www.agilent.com/find/contactus](http://www.agilent.com/find/contactus)

### Phone or Fax

#### United States:

(tel) 800 829 4444  
(fax) 800 829 4433

#### Canada:

(tel) 877 894 4414  
(fax) 800 746 4866

#### China:

(tel) 800 810 0189  
(fax) 800 820 2816

#### Europe:

(tel) 31 20 547 2111

#### Japan:

(tel) (81) 426 56 7832  
(fax) (81) 426 56 7840

#### Korea:

(tel) (080) 769 0800  
(fax) (080)769 0900

#### Latin America:

(tel) (305) 269 7500

#### Taiwan:

(tel) 0800 047 866  
(fax) 0800 286 331

#### Other Asia Pacific Countries:

(tel) (65) 6375 8100  
(fax) (65) 6755 0042

Email: [tm\\_ap@agilent.com](mailto:tm_ap@agilent.com)

Contacts revised: 9/17/04

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 1989, 2004  
Printed in USA, December 22, 2004  
5952-4854



**Agilent Technologies**